

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 773 643 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
14.05.1997 Bulletin 1997/20

(51) Int Cl.⁶: **H04B 15/00**

(21) Application number: **96307666.6**

(22) Date of filing: **23.10.1996**

(84) Designated Contracting States:
DE FR IT NL SE

(72) Inventor: **Freeman, Benedict Russell**
Cambridge CB4 1XA (GB)

(30) Priority: **09.11.1995 GB 9523018**

(74) Representative: **Dennis, Mark Charles et al**
Nortel Patents,
London Road
Harlow, Essex CM17 9NA (GB)

(71) Applicant: **NORTHERN TELECOM LIMITED**
Montreal, Quebec H2Y 3Y4 (CA)

(54) An interference reduction scheme and method

(57) This invention relates to telecommunications systems. The present invention provides a system and method operable to the cancel interference from digital subscriber line systems. A data signal demodulator having first and second inputs arranged to receive differential data signals and local field RFI signals respectively, wherein a digital adaptive notch filter is formed by DSP means which locates an interferer in the differential signal by adapting its bandwidth and centre frequency by

adaptation means and wherein the centre frequency and bandwidth of the notch filter are used to generate a bandpass filter centred on the interferer and of approximate bandwidth to the interferer; whose output, after processing forms a feedback signal which is sampled, processed, weighted and then combined with the local field RFI input signal of the demodulator, which combined signal is summed with the differential input signal to thereby cancel interference coupled onto the first input.

EP 0 773 643 A2

Description

FIELD OF THE INVENTION

This invention relates to data transmission systems and in particular to an interference reduction scheme and method.

BACKGROUND TO THE INVENTION

Most subscribers are coupled to a telecommunications network with a twisted pair wire loop commonly referred to as the subscriber loop. Where high speed data signals are to be sent to the subscriber, this twisted pair connects to a node associated with an optical distribution network which can be some 1000 m away from the subscriber. Such an arrangement is depicted in Figure 1. The first 950 m or so of cabling 12 from a junction box 10 is covered underground with trunking containing many twisted pairs of underground feeders 14, and the final 50m or so of wire from a distribution point 16 to a subscriber's installation is normally above ground and consists of an individual twisted pair 18 to each house 20.

In twisted pair copper loop networks, signals are transmitted in differential mode; that is to say, the signals are transmitted along both wires and any Radio Frequency Interference RFI will be picked up by both wires approximately equally with the wanted data signal being determined by the signal between wires at the receiver. Since high speed data is transmitted in this fashion, there should be no transmission problems in such an arrangement. However, there will always be present a certain amount of breakthrough between the common mode and the differential mode and there will always be some interference leaking through differentially, even though the interference is predominantly received in common mode. Typically this differential interference signal may be 30 dB less than the common mode interference signal, but this can cause problems if it is strong enough to distort the output of the associated analogue-to-digital converter, ADC, in addition to providing an increase in the background interference resulting in a corresponding decrease in the output carrier-to-noise ratio, CNR.

Adjacent radio amateurs provide one form of RFI, transmitting in any of the three amateur bands under 10 MHz who are known to cause up to 0 dBm signals to appear differentially on nearby overhead telephone lines. The interference will cause compression problems for the subscriber's ADC which will require the AGC to decrease its gain, causing a loss of dynamic range of signal. Twisted pair wires were originally developed to carry 3 KHz bandwidth; With the advent of services such as video on demand and computer networking, there is a requirement for a larger bandwidth, the provision of which is hampered by the effects of interference as described above.

There are many digital modulation schemes that have been developed, e.g. QAM / CAP, and can be used for subscriber loop schemes as described above. However, all these modulation schemes will be severely affected by interference, especially by high level narrow band interference eg radio amateur transmissions. The interference can cause automatic gain control (AGC) and ADC compression problems if high enough in power, as well as also decreasing the available carrier to noise ratio. Traditional techniques have been based on simple digital filtering techniques in the demodulator which cannot address the AGC/ADC problem. In contrast, analogue cancellation methods benefit from the use of a bandpass filter centred on or near the interferer and of approximate bandwidth to the interferer, which can then be used to determine a feedback loop. In most digital modulation schemes (other than digital multitone (DMT)) this is not readily available.

As a result of interference induced on a transmission line, it may be necessary to cease using channels which are corrupted by the interference, or alternatively to provide additional coding on the affected channels to better protect them from corruption. Both of these methods reduce the bandwidth which is available for the transmission of data.

OBJECT OF THE INVENTION

It is an object of the invention to reduce the effects of interference in data transmission schemes in the subscriber loop. It is a further object of the invention to provide a scheme whereby interference is reduced in a differential data signal transmission means by way of an analogue reduction method. It is a further object of the present invention to protect data from corruption by interference without putting constraints on the bandwidth available on a transmission line.

SUMMARY OF THE INVENTION

In accordance with the present invention in one aspect, there is provided a data signal demodulator operable to receive differential and local field RFI signals at first and second inputs respectively; wherein the first input is connected to a summation means which is operable to output signals to a cascade arrangement of an automatic gain control means, analogue to digital converter, and signal processor; wherein the signal processor includes an adaptive digital notch filter of variable bandwidth and centre frequency, the centre frequency and bandwidth of the notch filter being varied by means of an adaptation algorithm operating on a feedback signal from the output of the notch filter, to correspond with the centre frequency and the bandwidth of the interference, whereby a bandpass filter can then be formed, replacing the notch filter, by the signal processor the output of which forms a second feedback loop; wherein the second input is connected to a multiplier which is oper-

able to receive an input from the second feedback circuit; and wherein an output from the multiplier is connected to the summation means. The local field signal could be provided by a common mode signal associated with the transmission medium, for example a twisted pair cable.

Preferably the second feedback circuit includes: a processor operable to apply perturbation steps to the digital feedback signal, and convert the digital signal to an analogue complex weight and vector modulate the local field RFI signal with this complex weight.

In accordance with another aspect of the invention, there is provided a method of demodulating a differential signal in the presence of a local field interference signal, comprising: inputting the differential signal to a summation means, the output of which is converted to digital representation and then input into a signal processor which includes a first feedback circuit; generating a notch filter having a frequency and bandwidth corresponding to the centre frequency and bandwidth of the interfering signal, generating a pass band filter in the signal processor which pass band filter is complementary to the notch filter, feeding back a signal from the signal processor using a second feedback circuit which inputs to a processor, generating a weight signal which is subsequently multiplied with the local field signal by a multiplier; and outputting from the multiplier a signal which is summed with the differential signal by the summation means, whereby the effects of interference are reduced.

Preferably the second feedback circuit applies perturbation steps to the digital feedback signal and converts this digital signal to an analogue weight and vector modulates this local field RFI signal with this analogue weight.

The method reduces interference by the use of an adaptive perturbation algorithm in the second feedback circuit to derive an appropriate weight from a sample of some of the local field signal and using it to reduce the interference that has appeared on the differential mode. This weight can be a single complex analogue weight which will appropriately scale and phase shift the local field signal such that, when it is combined with the differential signal, the interference is decreased.

The output of the ADC, after adaptation, will be the digitised differentially received data signal with reduced interference. This data signal is then passed to the rest of the demodulator circuit and subsequent circuits.

In accordance with another aspect of the invention, there is provided a system for transmission of digital data in the form of a differential signal to a subscriber, comprising a twisted pair for carrying the differential signal to the subscriber's premises, a data signal demodulator operable to receive differential and local field RFI signals picked up by the twisted pair cable at first and second input respectively; wherein the first input is connected to a summation means which is operable to output signals to a cascade arrangement of an automatic gain control means, analogue to digital converter, and a sig-

nal processor; wherein the signal processor includes an adaptive digital notch filter of variable bandwidth and centre frequency, the centre frequency and bandwidth of the notch filter being varied by means of an adaptation algorithm operating on a feedback signal from the output of the notch filter, to correspond with the centre frequency and the bandwidth of the interference, whereby a bandpass filter can then be formed, replacing the notch filter, by the signal processor the output of which, after processing, forms a second feedback loop; wherein the second input is connected to a multiplier which is operable to receive an input from the second feedback circuit; and wherein an output from the multiplier is connected to the summation means.

BRIEF DESCRIPTION OF THE DRAWINGS

In order that a greater understanding of the invention may be attained, reference shall now be made to the Figures as shown in the accompanying drawing sheets:

Figure 1 shows a twisted pair copper loop which connects a node associated with an optical distribution network to a subscriber;

Figure 2 is a schematic arrangement of a telecommunications system in accordance with an embodiment of the invention;

Figure 3 shows one embodiment of the demodulator 28 of figure 2; and

Figure 4 details digital processing means shown in figure 3;

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Figure 2 shows a representation of a high speed data link suitable for the transmission of both digital data (such as Very Asymmetric Digital Subscriber Loop, VADSL, schemes) and analogue data. A broadcast centre 27 provides, for example, a digital video on demand service; this data is modulated by a modulator 21 and transmitted through a high capacity transmission medium, such as an optical fibre network 22. The optical fibres could support data links for hundreds of video subscribers; through various trunking arrangements, a fibre will terminate at a street-level junction box 23 to serve several subscribers. At this junction box there will be a modulator to serve each subscriber; data will be modulated by these modulators onto twisted wire pair carriers 24. As described in relation to figure 1, these twisted pair carriers will be directed through underground trunking 25 until they are required to be supported by pylons and the like 26 when proximate to subscriber's premises 20. The twisted pairs, upon entry to the subscriber's premises, will be passed to a demodulator 28 prior to the data signals being passed to telephones and modems for video on demand, computer networking serv-

ices and the like. Interference will be picked up by the twisted pairs most readily during transmission from the pylon to the subscriber's premises.

For services such as video on demand, the data rates will tend to be high only from the supplier of the video signals, whereas for computer networks, data rates are likely to be equally high in both transmit and receive modes from each terminal. Accordingly, for the provision of video on demand services, a demodulator as shown in figure 3 need only be provided at the subscriber terminal, whereas, for the provision of computer networking arrangements, a demodulator in accordance with figure 3 would also be required at the interface between the wires from the underground trunking at the street level junction box 25 prior to transmission to other computers in the network.

Figure 3 shows a demodulator circuit suitable for use as the demodulator 28 in figure 2. The demodulator circuit includes an input summer 33 which receives a differential mode signal and a common mode interference signal multiplied by a feedback signal, which outputs to an automatic gain control circuit 34, an analogue-to-digital converter 35, and a digital signal processor, DSP 36. The DSP outputs to a second feedback circuit, which second feedback circuit includes a processor 38 which applies perturbation steps to the feedback signal; this signal is weighted with a complex weight and is converted to analogue from digital and then multiplied with the common mode input signal at multiplier 37. The combined common mode - feedback signal is summed with the differential input signal of the demodulator whereby local field (common mode) interference coupled with the differential signal can be reduced.

Figure 4 shows the cascade arrangement of the automatic gain control circuit (AGC) 34, analogue to digital converter 35, and the DSP 36 of Figure 3. The DSP is operable to form, in a first mode, a notch filter 45, wherein the DSP receives a digital signal input, identifies and locates a source of interference using a feedback circuit 46 which includes a perturbation circuit 47, and in a second mode, a band pass filter. The information relating to the notch filter is utilised to form a band pass filter having characteristics complimentary to the notch filter.

The process will now be considered in more detail, as follows:

Stage 1 - Location of the interferer's centre frequency: An adaptive digital notch filter of varying centre frequency and bandwidth will be formed by digital signal processing techniques in the demodulator. The filter will adapt until its centre frequency is directly centred on the interferer. This can be done using an perturbation search adaptation algorithm on the notch filter centre frequency. The bandwidth of the notch filter may vary as the notch filter adapts, to facilitate accurate convergence.

Stage 2 - Formation of a feedback loop: The notch

filter is discontinued and a band pass filter, BPF, will be formed in the digital signal processor using the same centre frequency and bandwidth as the previous notch filter. This will allow narrow band power detection of the interferer. This power information can then be used for subsequent analogue cancellation.

Stage 3 - Analogue cancellation: The single analogue complex weight will now adapt using an adaptation algorithm driven by the second feedback loop, the output of the digital BPF. This will allow analogue cancellation of the RFI from the received differential signal.

Claims

1. A data signal demodulator 28 operable to receive differential and local field RFI signals at first and second inputs respectively; characterised in that the first input is connected to a summation means 33 which is operable to output signals to a cascade arrangement of an automatic gain control means 34, analogue to digital converter 35, and a signal processor 36; wherein the signal processor includes an adaptive digital notch filter of variable bandwidth and centre frequency, the centre frequency and bandwidth of the notch filter being varied by means of an adaptation algorithm operating on a feedback signal from the output of the notch filter, to correspond with the centre frequency and the bandwidth of the interference, whereby a band-pass filter can then be formed, replacing the notch filter, by the signal processor the output of which, after processing, forms a second feedback loop; wherein the second input is connected to a multiplier 37 which is operable to receive an input from the second feedback circuit; and wherein an output from the multiplier is connected to the summation means.
2. A data signal modulator according to claim 1 wherein the local field signal is provided by a common mode signal associated with a twisted pair cable transmission medium.
3. A data signal modulator according to claim 1 or 2 wherein the notch filter adaptation algorithm is a perturbation adaptation algorithm.
4. A data signal demodulator according to any one of claims 1 to 3 wherein the second feedback loop processor includes a perturbation adaptation algorithm.
5. A demodulator according to any one of claims 1 to 4 wherein the output from the analogue to digital

converter is passed to subsequent demodulator circuitry.

6. A telecommunications system comprising a demodulator as claimed in claim 1 and arranged to reduce the effects of unwanted signals on a wanted signal in a local subscriber loop. 5
7. A method of demodulating a differential signal in the presence of a local field interference signal, the method steps comprising: inputting the differential signal to a summation means the output of which is converted to digital representation and then input into signal processor which includes a first feedback circuit; identifying the interference signal, generating a notch filter having a frequency and band width corresponding to the frequency and bandwidth of the interference signal, generating a pass band filter complimentary to the characteristics of the notch filter, feeding back a signal from the signal processor using a second feedback circuit which inputs to a processor, generating a weight signal which is subsequently multiplied with the local field signal by a multiplier; and outputting from the multiplier a signal which is summed with the differential signal by the summation means, whereby the effects of the interference signal are reduced. 10 15 20 25
8. A method according to claim 7 wherein the second feedback circuit applies perturbation steps to the digital feedback signal and subsequently converts this digital signal to analogue complex weight and vector modulates the local field RFI signal with this complex weight. 30 35
9. A method according to claim 7 wherein the differential signal is fed to a twisted pair cable and the interference signal is energy which has been coupled by the cable. 40
10. A method of transmitting information to a subscriber through a twisted pair cable, comprising transmitting the information as a high speed digital differential signal along the cable to a demodulator, demodulating the signal. 45
11. A system for transmission of digital data in the form of a differential signal to a subscriber, comprising a twisted pair for carrying the differential signal to the subscriber's premises, a data signal demodulator operable to receive differential and local field RFI signals picked up by the twisted pair cable at first and second inputs respectively; wherein the first input is connected to a summation means which is operable to output signals to a cascade arrangement of an automatic gain control means, analogue to digital converter, and a signal processor; wherein the signal processor includes an adaptive digital 50 55

notch filter of variable bandwidth and centre frequency, the centre frequency and bandwidth of the notch filter being varied by means of an adaptation algorithm operating on a feedback signal from the output of the notch filter, to correspond with the centre frequency and the bandwidth of the interference, whereby a bandpass filter can then be formed, replacing the notch filter, by the signal processor the output of which, after processing, forms a second feedback loop; wherein the second input is connected to a multiplier which is operable to receive an input from the second feedback circuit; and wherein an output from the multiplier is connected to the summation means.

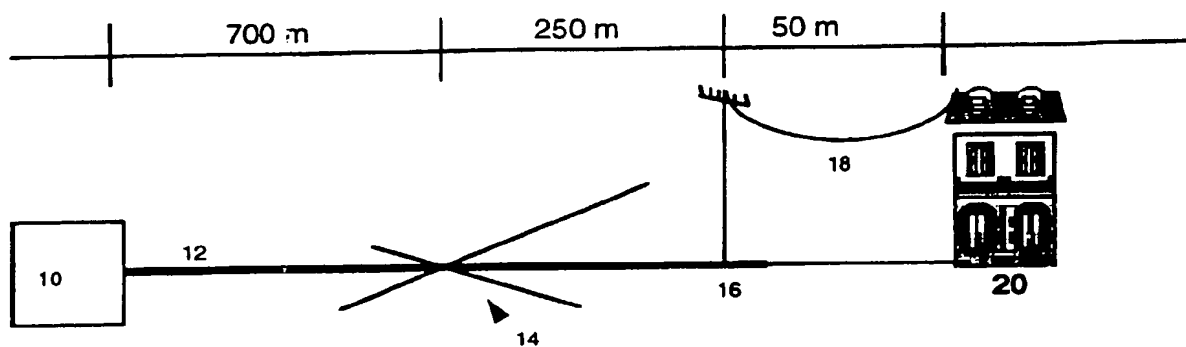


Figure 1

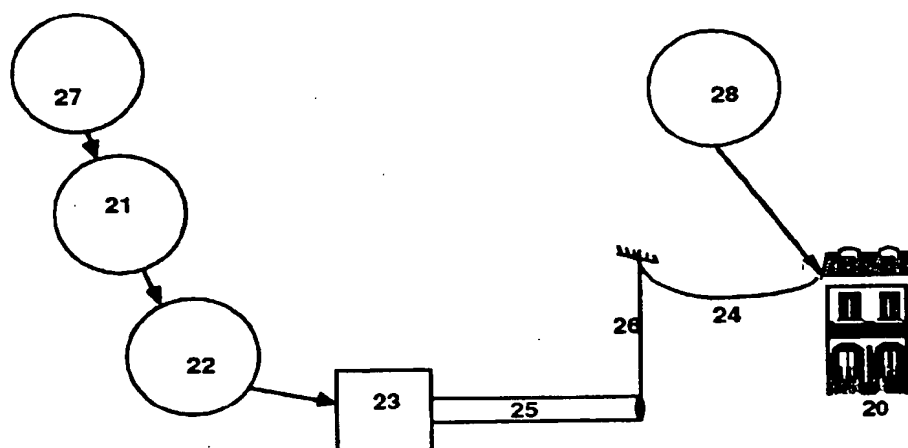


Figure 2

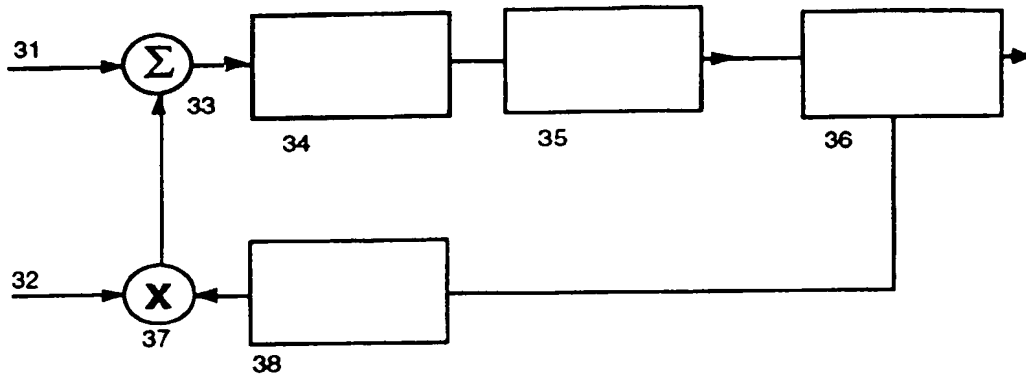


Figure 3


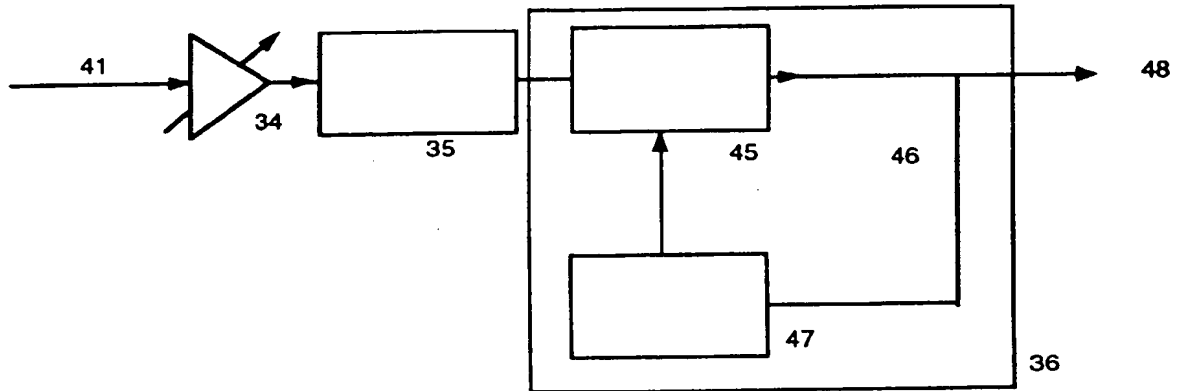


Figure 4



(19)

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 773 643 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
08.11.2000 Bulletin 2000/45

(51) Int Cl.7: **H04B 15/00, H04B 15/02,
H04L 27/26, H04B 1/12,
H04B 3/30**

(43) Date of publication A2:
14.05.1997 Bulletin 1997/20

(21) Application number: **96307666.6**

(22) Date of filing: **23.10.1996**

(84) Designated Contracting States:
DE FR IT NL SE

(72) Inventor: **Freeman, Benedict Russell**
Cambridge CB4 1XA (GB)

(30) Priority: **09.11.1995 GB 9523018**

(74) Representative: **Bewley, Ewan Stuart et al**
Nortel Networks
Intellectual Property Law Group
London Road
Harlow, Essex CM17 9NA (GB)

(71) Applicant: **Nortel Networks Limited**
Montreal, Quebec H2Y 3Y4 (CA)

(54) **An interference reduction scheme and method**

(57) This invention relates to telecommunications systems. The present invention provides a system and method operable to the cancel interference from digital subscriber line systems. A data signal demodulator having first and second inputs arranged to receive differential data signals and local field RFI signals respectively, wherein a digital adaptive notch filter is formed by DSP means which locates an interferer in the differential signal by adapting its bandwidth and centre frequency by

adaptation means and wherein the centre frequency and bandwidth of the notch filter are used to generate a bandpass filter centred on the interferer and of approximate bandwidth to the interferer; whose output, after processing forms a feedback signal which is sampled, processed, weighted and then combined with the local field RFI input signal of the demodulator, which combined signal is summed with the differential input signal to thereby cancel interference coupled onto the first input.

EP 0 773 643 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 96 30 7666

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	YOUNG G ET AL: "BROADBAND MULTIMEDIA DELIVERY OVER COPPER" BT TECHNOLOGY JOURNAL, GB, BT LABORATORIES, vol. 13, no. 4, 1 October 1995 (1995-10-01), pages 78-96, XP000538882 ISSN: 1358-3948	10	H04B15/00 H04B15/02 H04L27/26 H04B1/12 H04B3/30
A	* page 83, column 2, paragraph 3.1 - page 85, column 2, paragraph 3.2 *	1-9,11	
X	US 4 561 068 A (KINDLER ULRICH) 24 December 1985 (1985-12-24)	10	
A	* column 1, line 6 - column 2, line 4; figures 1-3 *	1-9,11	
A	JAQUES J ET AL: "A TRACKING BANDPASS FILTER FOR THE REJECTION OF POWER SYSTEM DISTURBANCES" PROCEEDINGS OF THE EUROPEAN CONFERENCE ON POWER ELECTRONICS AND APPLICATIONS, GB, LONDON, IEE, vol. CONF. 5, 13 September 1993 (1993-09-13), pages 47-52, XP000427048 * page 47, column 1, line 1 - page 49, column 1, line 9; figures 1,2 *	1-11	
A	US 5 117 505 A (TALWAR ASHOK K) 26 May 1992 (1992-05-26) * column 3, line 38 - column 5, line 16; figures 1,6 *	1-11	
A	EP 0 453 213 A (MARCONI GEC LTD) 23 October 1991 (1991-10-23) * abstract; figures 1-5 *	1,7,10,11	
T	EP 0 785 636 A (TEXAS INSTRUMENTS INC) 23 July 1997 (1997-07-23)		
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 21 September 2000	Examiner Andersen, J.G.
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 (3.82) (P4/C31)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 96 30 7666

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

21-09-2000

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4561068	A	24-12-1985	DE 3224768 A	05-01-1984
			FR 2529734 A	06-01-1984
			GB 2123260 A,B	25-01-1984
			JP 59033935 A	24-02-1984
US 5117505	A	26-05-1992	CA 2036481 A	23-08-1991
			GB 2241412 A,B	28-08-1991
EP 0453213	A	23-10-1991	AU 643265 B	11-11-1993
			AU 7502691 A	24-10-1991
			DE 69132265 D	03-08-2000
			GB 2243271 A,B	23-10-1991
			JP 8107367 A	23-04-1996
			NO 911457 A	18-10-1991
EP 0785636	A	23-07-1997	US 5278870 A	11-01-1994
			NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82